

Mini-Marquees[®]

Pegs and Guy Ropes



Step 1



Step 2




Step 3

Although the Mini-Marquee[™] has been designed primarily as a free standing unit, it is essential that whenever used outside it is firmly secured.

1. The framework is to be secured at all times through the holes in the feet.
Ensure legs are in a true vertical position before fixing.
2. Clip the hook of the ratchet strap through the eyelet on the link strap and secure to steel peg – tension using spring loaded tensioner.
3. Secure the outside lower edge of the side panels using the 200mm pegs supplied
4. Lay the “sod cloth” section of the side panel to the inside of the marquee and secure with the “groundsheet pegs”
5. Using the guy ropes provided – secure the “D” links on the side panels to the anchored 300mm red plastic pegs.



Step 4

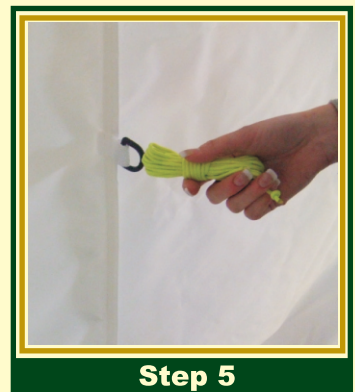

Step 5